



PRODUCT CATALOG.

INDUSTRY LEADING WARRANTY



INCLUDES SPINDLES & GEARBOXES

EXPERIENCED SERVICE & SUPPORT NETWORK

* T & Cs APPLY



With a strategic focus on meeting the growing demands of our largest sales market, over 90% of US sold mowers are now manufactured in Fayetteville, Georgia.

We're excited to share the strategic vision behind our recent investment in expanding our USA factory. It's a testament to our unwavering commitment to quality and customer satisfaction. We've nearly tripled the square footage of our manufacturing space in 2023 and made significant investments in cutting-edge manufacturing technologies. Moreover, we've prioritized the training and employment of a local workforce to operate the facility.

Building a self-sufficient local manufacturing plant has been a challenging yet immensely rewarding journey for us. We've diligently forged partnerships with the best local suppliers who meet our rigorous quality standards. These relationships ensure that all materials and components align with our dedication to excellence.

Introducing innovative technologies like our two-step powder coating system further strengthens our commitment to product durability and performance.

Our choice of Fayetteville as our location, strategically made in 2019, leverages Atlanta's renowned reputation as a transportation hub and provides access to a highly skilled local workforce.

Through our investment in local manufacturing, we've successfully eliminated international shipping delays and significantly reduced lead times. This agility is crucial for us to deliver products promptly to our local customers.

Our flagship products, the Trimax Snake, Pegasus, and Vulcan, now proudly display "Made in the USA" decals as a tribute to their local origin. We're thrilled to uphold our core values by delivering premium products manufactured and supported right here in the USA.

- The Trimax Mowing Systems Team







ROTARY MOWERS



STRIKER



PROCUT/S5



STEALTH/S3



SNAKE/S3



PEGASUS S5



X-WAM/S5



X-WAM/S5ZR



VULCAN



FLAILDEK/FX



EZEEMOW/FX



WARLORD S3



KEY APPLICATIONS.

✓ Sports fields & pitches
✓ Golf Courses
✓ Country Clubs
✓ Estates & Lifestyle Blocks
✓ Schools

WHAT'S NEW ON STRIKER

The Striker was originally designed as a compact solution for sports turf, especially for grounds maintenance for local football and cricket clubs. It features a simpler pan construction than the ProCut and includes maintenance-free ball bearing spindles.





TRIMAX STRIKER

FAST BECOMING THE MOWER OF CHOICE AMONGST GROUNDSMEN.

Trimax STRIKER is a multi-spindled rotary mower with extremely low maintenance requirements and is ideal for use on compact tractors.

The Trimax Striker is designed to give a high cut quality and an excellent spread of clippings. Highly versatile, the Striker is capable of mowing grass \(^3/8\)" - 4". With an enclosed cutting chamber and a downward rear dispersion of clippings, the Striker has surpassed international safety standards making it one of the safest mowers on the market for use in public spaces.

Fitted with Trimax's exclusive LazerBladez™, the Striker can produce a cut and finish to rival that of a reel mower and is ideal for educational and sports facilities where presentation is key!







SPECIFICATIONS	150	190
Cutting Width	4' 9 ½" (1.46m)	6' 4 ½" (1.96m)
Overall Width	5'1½" (1.56m)	6' 8 ½" (2.04m)
Overall Length	3' 9 ½" (1.16m)	3' 9 ½" (1.16m)
Height	2' 8" (0.83mm)	2' 8" (0.83mm)
Cut Height Range	3/8" - 4" (10 - 100mm)	¾" - 4" (10 - 100mm)
No. of Blade Spindles	3	4
Approx. Weight	710lbs (322kg)	882lbs (400kg)
Min PTO Output	25hp	30hp
*Minimum DTO output is a quia	la only Dogwirement varies with the	tune of work and the terrain

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



What used to take half a day now takes less than an hour, we can mow when the grass is wet, it doesn't scalp and we can stripe the fields. It's very impressive! PAUL CHEETHAM | Immanueal Lutheran College, Sunshine Coast QLD, AUS

PRODUCT **FEATURES**



I OW COST OF OWNERSHIP

With only 4 grease points on the mower and with robust sealed spindles, the Trimax Striker has incredibly low maintenance requirements.



SAFETY FOR PUBLIC PLACES

Striker exceeds international safety standards, and can be used with confidence in public spaces, school sports turf and confined areas.



LAZERBLADEZ"

Available in up lift and flat formation to suit mowing requirements, the unique tilt forward design minimizes hang back in tough conditions.



ADVANCED ENGINEERING

Trimax's meticulous design process combined with bespoke, innovative manufacturing technologies produce the most accurate rotary cutting in the market.



STRIPING CAPABLE

Fitted with full width front and rear rollers, the Striker can produce striped patterned turf for those spaces where presentation is key.



COMPACT TRACTOR SUITABLE

Able to be paired with tractors as low as 20hp, the Striker is perfect for smaller budgets and compact

*OPTIONAL FEATURES.

✓ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ ON-CALL KIT

Each kit contains bearings, blades, and belts for a quick replacement in the field.



*OPTIONAL

✓ ANTI-BOUNCE / WEAR SKIDS Eliminates scalping and bouncing and reduces side channel wear.

▼ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ GALVANIZED SURFACE COATING

environments.

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread

✓ ON-CALL KIT

KEY APPLICATIONS.

✓ Municipalities
✓ Sport Fields
✓ Turf
✓ Education
✓ Golf
✓ Estates & Lifestyle Blocks

WHAT'S NEW ON PROCUT/S5

Maintaining your mower has never been easier with all daily greasing requirements being removed with the implementation of the new Titan Roller Bearings. The new auto-belt tensioning system reduces belt maintenance and improves drive to the spindles for a cleaner, more consistent cut in heavy conditions.





The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



STEADFAST SEALED SPINDLES We've eliminated the tedious task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.

Full width rollers minimise



ACCURATE SPINDLE SETTING **TECHNOLOGY** scalping in undulating conditions and allow mowing over kerbsides and bunkers. Also aids in striping.



Removes the need for belt adjustments and improves drive to the spindles and blades.



BELT CAVITY DUAL WASH FLAPS Provides easy access for removal of grass and drainage of water from belt chamber.



Spindle height is perfectly aligned providing the most accurate cut possible.



Available in uplift and flat formation

to suit mowing requirements, the unique tilt forward design minimises

PRECISE HEIGHT ADJUSTMENT

Clearly displayed indicators in

both metric and imperial units

and a high-tensile 2mm pitch

hang back in tough conditions.

STAND ON COVERS Enables safe and easy access to the rear of the tractor when coupling the mower. Quick release latches allow easy removal for cleaning and servicing.



NDUSTRY LEADING WARRANTY

& SUPPORT NETWOR

FEATURES.

Protect against corrosion in harsh

✓ OUATTRO BLADES

when it matters most.

Each kit contains bearings, blades, and belts for a quick replacement in the field.





Min PTO Output 35hp

SPECIFICATIONS 178

Cutting Width

Overall Width

Overall Length

Height

Range

Cut Height

No. of Blade

Spindles

The ProCut is the best mower I've ever had... it mows my polo field to perfection. CHRISTOPH GERBERDING | Polo Grounds, Milford, New Jersey

ENGINEERED TO WITHSTAND

210

4' 9" (1.44m) 4' 11 ½" (1.51m) 4' 9" (1.44m)

(3/8" - 4 1/4")

10 - 110mm

Approx. Weight 1085lbs (492kg) 1197lbs (543kg) 1334lbs (605kg) (1559lbs (707kg)

*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

5' 8 ½" (1.74m) 6' 9" (2.06m)

6' 2 ½" (1.89m) 7' 3" (2.21m)

(3/8" - 4 1/4")

10 - 110mm

EVERYDAY USE IN THE TOUGHEST COMMERCIAL

ENVIRONMENTS.

237

3' 6 ½" (1.08m) 3' 6 ½" (1.08m) 3' 6 ½" (1.08m) 3' 6 ½"

7'7" (2.32m)

8'1" (2.47m)

(3/1" - 4 1/1")

10 - 110mm

290

9'6" (2.89m)

10' (3.04m)

4' 9" (1.44m)

 $(\frac{3}{8}'' - 4\frac{1}{3}'')$

10 - 110mm

5

55hp

TRIMAX

TRIMAX

fields.

PROCUT/S5

A highly versatile roller mower, the

PROCUT SERIES 5 is a multi-spindled

roller mower designed to give a high cut

The ProCut has been a successful part of the Trimax range

for over 30 years. Mowing parks, reserves, school grounds,

sports fields and golf courses around the world - From the

grounds of Windsor Castle to your local community sports

The ProCut Series 5, released in 2023 is excellence refined.

quality and a great spread of clippings.

TRIMAX STEALTH S3

TRIMAX

S1=4/53

The STEALTH SERIES 3 has been designed to give a higher quality of cut, operate in a wider range of conditions, be safer, more robust, easier to operate and take less time to maintain than any previous STEALTH.

Backed by over 30 years' of experience in market, the concept of Stealth Series 3 was born from the demand of our Australian customers for a mower that was more versatile in terms of long grass performance and more user friendly for both the operator and the workshop.

Backed by our industry leading 3-year warranty and our parts and technical support team, we know the Stealth Series 3 to be the best linkage wing mower for passive and active turf in the market.

TALK TO US TODAY ABOUT THE CAPABILITIES OF STEALTH SERIES 3 IN YOUR ENVIRONMENT.







SPECIFICATIONS	340
Cutting Width	11' 2" (3.4m)
Overall Width	11' 8" (3.55m)
Transport Width	7' 11" (2.42m)
Overall Length	5' 4" (1.63m)
Height	3' 11 ½" (1.21m)
Cut Height Range	³⁄8" - 3½" (10 - 90mm)
No. of Blade Spindles	5
Approx. Weight	2070lb (940kg)
Min PTO Output	70hp

*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



We're mowing 7 hours a day and getting large areas done quickly. It's easily maneuverable and the contouring following ability of the wings and the ability to fold up them up with an in-cab transport lock is a huge advantage. JOHN ROSNELL | Springbrook Wholesale Nursery, Gold Coast QLD

KEY APPLICATIONS.

- ✓ Municipalities ✓ Parks & Reserves ✓ Estates & Lifestyle Blocks ✓ Racecourses ✓ Sports Fields
- → Horticulture → Aviation

WHAT'S NEW ON STEALTH/S3

We've reduced the need for greasing through the introduction of new features such as SteadFast maintenance-free spindles and composite maintenance-free bushes. Stealth wing locks can now be operated from inside the tractor cab. Modifications have been made to the cutting chamber and the baffle design for improved cut quality and easy cleaning.



PRODUCT FEATURES.



A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance.



GREATER MOWING VERSATILITY

The improved cutting chamber and baffle design directs airflow from the blades out and over the rear roller for a better cut and spread.



Unlock the mower wings' transport lock from the convenience of the tractor seat using the tractor's hydraulic control lever.



Operators are no longer required to grease hinge points and spindles on a daily basis and can spend more time mowing and less time on maintenance.



EASY TO CLEAN

The improved belt chamber design results in easy cleaning, with the front openings allowing any grass to be easily washed out or removed.



ANTI-WEAR SKIDS

Anti-wear skids reduce wear on side channels when operating in rough or uneven terrain.



Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimizes hang back in tough conditions.



EASY HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings or deck.



STAND ON COVERS

Enables safe and easy access to the rear of the tractor when coupling to the mower. Quick release latches allow easy removal for cleaning and servicing.



✓ ROLLER SCRAPERS


Cleans rollers and reduces clumping in wet conditions.

✓ ON-CALL KIT

Each kit contains bearings, blades, and belts for a quick replacement in the field.

✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.







TRIMAX SNAKE/S3

The Trimax Snake sets the standard for trailed rotary mowing, trusted by many prestigious golf courses and turf farms worldwide.

Studied by the Sports Turf Institute of New Zealand, the Trimax cutting system delivers cut quality comparable to reel mowers, while offering the versatility and reliability of Trimax's renowned rotary design.

Now, with zero daily maintenance, the Snake S3 makes operations even more efficient for turf professionals. The Snake S3 features the Titan roller bearing system and maintenance-free wheel hubs, which together eliminate the need for daily greasing. These innovations further reduce the cost of ownership allowing owners and operators to focus on what matters most - mowing.

Backed by Trimax's industry-leading 3-year warranty, the Snake S3 redefines productivity and operational efficiency.

TALK TO US TODAY ABOUT THE CAPABILITIES OF SNAKE SERIES 3 IN YOUR ENVIRONMENT.







SPECIFICATIONS	320	400
Cutting Width	10' 7" (3.20m)	13' 1" (4.00m)
Overall Width	11' 1" (3.36m)	13' 6" (4.12m)
Overall Length	11' 10" (3.6m)	11' 10" (3.6m)
Transport Width	7' ½" (2.14m)	7' ½" (2.14m)
Transport Height	6' 1" (1.86m)	7' 4" (2.24m)
Cut Height Range	3/8" - 4" (10 - 100mm)	³ / ₈ " - 4" (10 - 100mm)
No. of Blade Spindles	9	11
Approx. Weight	2976lbs (1350kg)	3258lbs (1480kg)
Min PTO Output	35hp	45hp

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



It's one of my favourite mowers. Maintenance is an absolute breeze and the service from Trimax has been brilliant. I would recommend this mower to any country club or golf course.

SIMON ASKEY | Head Green Keeper, Whangamata Golf Club

KEY APPLICATIONS.

- ✓ Golf Courses (Roughs & Fairways) ✓ Municipal & Contractors ✓ Turf ✓ School & Sports Fields
- ✓ Lifestyle & Estates

WHAT'S NEW ON SNAKE/S3

The Snake S3 builds on the Snake legacy with Trimax Titan roller bearings and maintenance-free wheel hubs for zero daily maintenance. New features also include height adjustment collars, stand-on covers, and removable blade beams for easy operation—letting turf professionals focus on exceptional results.

PRODUCT FEATURES



TITAN ROLLER BEARING SYSTEM The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



ARTICULATION ABILITY

With three articulating decks the Snake has the ability to provide a consistent cut when contours are



Allows continuous cutting while turning sharply for maximum productivity



ZERO DAILY MAINTENANCE

Implementation of the Trimax Titan roller bearing system and maintenance-free wheel hubs results in no daily maintenance.



FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions, allowing for mowing over kerbsides and bunkers, while leaving a premium striped finish.



EASE OF USE

The Snake's compact design allows easy towing, new collars simplify height adjustment, and removable blade beams ensure easy blade changes.



AUTOMATIC BELT TENSIONERS

Automatic belt tensioners eliminate the need for belt adjustments and provides consistent drive to the spindles and blades.



QuikLIFT enables decks to be raised slightly for traversing paths without the need to disengage the PTO.



LAZERBLADEZ"

LazerBladez offer a superior finish with a cost-efficient design, as only the fling-tip needs replacing. Available in uplift and flat formations, their tiltforward design minimizes hang-back in tough conditions.

*OPTIONAL FEATURES.

✓ ANTI-BOUNCE / WEAR SKIDS Eliminates scalping and bouncing and reduces side channel wear.

✓ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ ELECTRIC UNLOCK

Unlocks decks electronically from the tractor seat.

✓ MUDGUARDS, LIGHTS, & CHAINS

Add LED tail light clusters, safety chains, and transport wheel mudguards for increased safety during road transportation.

✓ MULCH KIT

Save on purchasing dedicated leaf blowing and collection units with the Snake Mulch Kit.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ MULTI LIFT SYSTEM

Five different lift functions to adjust mowing widths when required.

✓ TRIMAX CONNECT

A free app available when Trimax Multi-Lift System (MLS) is fitted. Provides mower runtime analysis and controls MLS functionality. **✓** ON-CALL KIT

Each kit contains bearings, blades. and belts for a quick replacement in the field.





TRIMAX PEGASUS/S5

The Trimax Pegasus sets the benchmark in wide area mowing for parks, reserves, airports, racecourses, sports fields, turf farms, and more.

For over 20 years, the Trimax Pegasus has been leading the way in wide-area mowing. Introduced in 2001 as the world's first multideck roller mower, the Pegasus is renowned for its robustness and versatility. Its fast spindle speeds and deep mowing decks deliver the highest quality cut and finish every time, and articulating decks provide a consistent cut over light to moderate contours.

The Pegasus S5 builds on the incredible strength, durability, versatility, and efficiency of the previous series to increase machine life and decrease downtime in full-time commercial applications.

TALK TO US TODAY ABOUT THE CAPABILITIES OF **PEGASUS SERIES 5** IN YOUR ENVIRONMENT.

SPECIFICATIONS 493 610 **722 Cutting Width** 16' 2" (4.94m) 19'11" (6.09m) 23' 9" (7.23m) **Overall Width** 16' 9" (5.1m) 20' 6" (6.24m) 24' 3" (7.39m) **Overall Length** 15' 3" (4.65m) 15' 3" (4.65m) 15' 3" (4.65m) 8' 3 ¾" (2.53m) **Transport Width** 8' 3 ¾" (2.53m) 8' 3 ½" (2.53m) 8'7" (2.62m) 10' 6" (3.2m) 12' 6" (3.8m) **Transport Height** 3/11 - 41/₃ $\frac{3}{8}$ " - $4\frac{1}{3}$ " 3/11 - 41/11 **Cut Height Range** (10 - 110mm) (10 - 110mm) (10 - 110mm) No. of Blade Spindles 9 13 11 4895lbs (2200kg) 5380lbs (2440kg) 5865lbs (2660kg) Approx. Weight **Min PTO Output** 50 hp 55 hp 60 hp

KEY APPLICATIONS.

✓ Turf / Sod Farm ✓ Parks & Reserves ✓ Racecourses, Polo, & Sports Turf ✓ Aviation ✓ Large Estates

WHAT'S NEW ON PEGASUS S5

The Pegasus chassis and outrigger arms have been completely redesigned to increase strength without adding unnecessary weight. Larger wheels decrease ground pressure and support a wider range of tyre options.

Maintenance-free features have been introduced.

PRODUCT FEATURES.



ROBUST CHASSIS

10% stronger under tough travel conditions, twice the durability in deck lifting and lowering, and a 60% increase in rigidity in the outrigger arms from Pegasus S4.



IMPACT PROTECTION

Outrigger arms and side channel leading edges have been redesigned for increased impact protection.



SUSPENSION

The new Pegasus S5 Torque Suspension System is designed for increased strength and smoother travel at highway speeds.



LOW MAINTENANCE

Zero daily greasing for an 80% reduction in annual grease consumption. Spindles, roller bearings, and auto-belt tensioning are maintenance-free.



AUTO BELT TENSIONING

Improves drive to the spindles without requiring manual belt adjustments.



HEIGHT ADJUSTMENT

Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height alterations.



OUIKLIFT

Enables mower decks to be raised without disengaging the PTO to traverse driveways, footpaths and pavements. Now a standard inclusion for all Pegasus models.



TITAN ROLLER BEARING SYSTEM

The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



SAFETY COMPLIANT

Complies with international safety standards and can be used with confidence on the roads and in public spaces.



STAND ON BELT COVER

Provides safe and easy access to the

*OPTIONAL FEATURES.

✓ ANTI-BOUNCE / WEAR SKIDS

Eliminates scalping and bouncing and reduces side channel wear.

✓ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

MULTI-LIFT SYSTEM

Five different lift functions for mower decks. Now with Drive Protect.

✓ OUATTRO BLADE SYSTEM

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ ELECTRIC UNLOCK

Unlocks decks electronically from the tractor

✓ TURF TIRES

Distributes mower weight for less ground disturbance.

✓ SPARE ROAD TIRE & MOUNT

Mounts a spare wheel to the rear mowing deck.

✓ STORAGE KIT Mounts a toolbox to the mower chassis.

✓ GALVANIZED SURFACE COATING

Protect against corrosion in harsh

environments. • ROAD KIT

Adds lights, signage, and beacons to the mower.

✓ TURF MUDGUARDS

Available for both road tires and turf tires.

• ON-CALL KIT

Each kit contains bearings, blades, and belts for a quick replacement in the field.



^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

NEW PRODUCT RELEASE

TRIMAX X-MA/S5





The X-WAM S5 is Trimax's largest mower, purpose-built for wide area turf management. With a 38-foot cutting width, 4ft larger than its predecessor, productivity is increased by 11%, saving time and lowering operational costs.

Front and rear rollers follow contours, providing excellent anti-scalp protection, while leaving a premium striped finish. Maintenancefree spindles and roller bearings result in zero daily maintenance requirements.

Built on a fully integrated chassis, the X-WAM S5 is 50% stronger than its predecessor, increasing machine life in the toughest conditions. QuikLift is now included, reducing the risk of headland damage whilst turning. Its compact transportation design allows for safe and easy relocation between fields whilst its variable cutting width allows you to change mow widths when needed.

Backed by Trimax's industry leading 3 year warranty, the X-WAM S5 is the ultimate solution for wide area turf management.

TALK TO US TODAY ABOUT THE CAPABILITIES OF X-WAM SERIES 5 IN YOUR ENVIRONMENT.





AREA MOWING.



SPECIFICATIONS	1150
Cutting Width	37' 7" (11.5m)
Overall Width	38' 3" (11.65m)
Overall Length	21' 9" (6.64m)
Transport Width	9' 8 ½" (2.96m)
Transport Height	13' 5" (4.1m)
Cut Height Range	3/8" - 4 1/2" (10 - 110mm)
No. of Blade Spindles	21
Approx. Weight	12,060lbs (5,470kg)
Min PTO Output	90 hp

^{*}Minimum PTO output is a guide only.

Requirement varies with the type of work and the terrain



Trimax X-WAM is great equipment. It replaced one tractor, one employee and reduced mowing time. Less equipment to maintain and less equipment expense has increased our profitability. LYNN GIBB | Hope Plantation Turf, Texas USA

KEY APPLICATIONS.

✓ Turf / Sod Farms

WHAT'S NEW?

The new X-Wam is 4ft larger than the previous model. The deck design has been brought in line with the Pegasus S5, providing a range of maintenance and quality improvements. With QuikLift now standard, it is the most maneuverable wide area mower in its class.

PRODUCT FEATURES



FULL WIDTH ROLLERS

Front and rear rollers follow contours, providing excellent antiscalp protection, while leaving a premium striped finish.



VARIABLE CUTTING WIDTH

With a variable cutting width between 23'9 and 38' you can adjust your mow widths quickly when required.



EASE OF USE

Stand-on covers, hydraulic parking jack, and electric unlock simplify



AUTOMATIC BELT TENSIONING

Automatic belt tensioners eliminate the need for belt adjustments and provides consistent drive to the spindles and blades.



OUIKLIFT

Enables mower decks to be raised without disengaging the PTO to reduce turf damage when turning.



WHEELS RUN ON CUT GRASS

The rear deck is located between the transport wheels, so the grass is not flattened prior to mowing.



ZERO DAILY MAINTENANCE

Zero daily maintenance. Spindles and Titan roller bearings are maintenance-free.



ULTIMATE CONTOUR FOLLOWING

The X-Wam S5 features multiple small, robust decks for superior cut quality in undulating conditions.



TURE TIRE

The chassis tires are 15% wider than the previous model distributing weight evenly across the turf.



FULLY INTEGRATED CHASSIS

The X-WAM has a purpose built fully integrated chassis which has increased durability by 50% compared to the previous model.

*OPTIONAL FEATURES.

✓ GALVANIZED SURFACE COATING

Protects against corrosion in harsh conditions.

✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ ANTI-BOUNCE / WEAR SKIDS Eliminates scalping and bouncing

and reduces side channel wear. **✓ ROLLER SCRAPERS**

Cleans rollers and reduces clumping in wet conditions.

✓ ON-CALL KIT

Each kit contains blades and belts for a quick replacement in the field.





TRIMAX X-MAM/S5ZR

The X-WAM S5 Zero Roller (ZR) is Trimax's largest mower, purpose-built for wide area turf management. With a 38-foot cutting width, 4ft larger than its predecessor, productivity is increased by 11%, saving time and lowering operational costs.

Mowing decks travel on front and rear casters, allowing long grass to be cut without being rolled first, perfect for delicate grasses and regular maintenance mowing. Maintenance-free spindles and caster wheels result in zero daily maintenance requirements.

Built on a fully integrated chassis, the X-WAM S5 ZR is 50% stronger than its predecessor, increasing machine life in the toughest conditions. QuikLift is now included, reducing the risk of headland damage whilst turning. Its compact transportation design allows for safe and easy relocation between fields whilst its variable cutting width allows you to change mow widths when needed.

Backed by Trimax's industry leading 3 year warranty, the X-WAM S5 ZR is the ultimate solution for wide area turf management.

TALK TO US TODAY ABOUT THE CAPABILITIES OF X-WAM SERIES 5 ZR IN YOUR ENVIRONMENT.







SPECIFICATIONS	1150
Cutting Width	37' 7" (11.50m)
Overall Width	38' 3" (11.65m)
Overall Length	24' 1" (7.36m)
Transport Width	9' 8 ½"(2.96m)
Transport Height	13' 5" (4.1m)
Cut Height Range	³ / ₄ " - 7 ¹ / ₂ " (20 - 180mm)
No. of Blade Spindles	23
Approx. Weight	12,740lbs (5,780kg)
Min PTO Output	90 hp

^{*}Minimum PTO output is a guide only.

Requirement varies with the type of work and the terrain



Trimax X-WAM is great equipment. It replaced one tractor, one employee and reduced mowing time. Less equipment to maintain and less equipment expense has increased our profitability. LYNN GIBB | Hope Plantation Turf, Texas USA

KEY APPLICATIONS.

✓ Turf / Sod Farms ✓ Passive Turf & Open Space

WHAT'S NEW?

The new X-Wam is 4ft larger than the previous model. The deck design has been brought in line with the Pegasus S5, providing a range of maintenance and quality improvements. The inclusion of front and rear casters make it perfect for use on delicate grass species, maintenance mowing and open space long grass applications. With QuikLift now standard, it is the most maneuverable wide area mower in its class.



PRODUCT FEATURES.



FRONT & REAR CASTERS

Mowing decks travel on front and rear Spindles, caster wheels and casters, allowing long grass to be cut without being rolled first. Casters are offset to minimise compaction.



OUIKLIFT

Enables mower decks to be raised without disengaging the PTO to reduce turf damage when turning.



EASE OF USE

Stand-on covers, hydraulic parking jack, and electric unlock simplify



ZERO DAILY MAINTENANCE

auto-belt tensioning system are maintenance-free.



OPTIMAL HEIGHT OF CUT RANGE

The front and rear casters enable a height of cut range of 3/4" to 7 1/2", Making it suitable for use across a variety of grass lengths.



WHEELS RUN ON CUT GRASS

The rear deck is located between the transport wheels, so the grass is not flattened prior to mowing.



VARIABLE CUTTING WIDTH

With a variable cutting width between 23'9 and 38' you can adjust your mow widths quickly when reauired.



ULTIMATE CONTOUR FOLLOWING

The X-Wam S5 features multiple small decks for superior cut quality in undulating conditions.



The chassis tires are 15% wider than the previous model distributing weight evenly across the turf.



FULLY INTEGRATED CHASSIS

The X-WAM has a purpose built fully integrated chassis which has increased durability by 50% compared to the previous model.

*OPTIONAL FEATURES.

✓ GALVANIZED SURFACE COATING

Protects against corrosion in harsh conditions.

✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ ON-CALL KIT

Each kit contains blades and belts for a quick replacement in the field.





TRIMAX VULCAN

The Trimax VULCAN is the highest return on investment castor wheel mower in the market.

Designed with all the latest features and innovations Trimax has to offer, the Vulcan provides significant long term cost savings for sod and turf farms. Vulcan has been shown to consume 31% less PTO power, which corresponds to fuel savings of up to 14% when compared to the current industry leading castor wheel mower.

Subjected to extensive strength and durability testing during development, the Vulcan is incredibly robust, suitable for full-time commercial use and engineered for longevity of life – a feature Trimax mowing equipment is renowned for. The Vulcans almost 24' cut width paired with Trimax design standards and cut technologies make the Trimax Vulcan the most efficient caster wheel mower on the market!



SPECIFICATIONS	725
Cutting Width	23' 9" (7.25m)
Overall Width	23'10" (7.28m)
Overall Length	20' (6.1m)
Transport Width	8' 1" (2.46m)
Transport Height	11' 8" (3.55m)
Cut Height Range	³¼" - 5" (20 - 130mm)
No. of Blade Spindles	11
Approx. Weight	5666lbs (2550kg)
Min PTO Output	60 hp

 $[\]hbox{*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain}$

KEY APPLICATIONS.

✓ Turf / Sod Farm

WHAT'S NEW ON VULCAN

The Vulcan is up to 14% more fuel efficient than competitor mowers, with three floating decks supported by puncture-proof offset castor wheels. The Vulcan has less steel-on-steel wear than comparable castor wheel mowers and has a proven and simple belt drive

PRODUCT FEATURES.



PUNCTURE PROOF SOLID TIRES
These solid closed cell, airless
formulated tires do not absorb water
allowing superior rolling performance,
durability, and no punctures.



We've eliminated the tedious task of spindle greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.



The Vulcan complies with agricultural standard ISO4254 for protection against thrown objects, blade impact, blade unbalance and more.



GALVANISED SURFACE COATING
Provides added protection against
corrosion in coastal environments
with high salt concentrations or high
fertiliser usage.



AUTOMATIC BELT TENSIONERS
Automatic belt tensioners eliminate
the need for belt adjustments and
improves drive to the spindles and
blades



Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimizes hang back in tough conditions.



EASILY TRANSPORTABLECompacts to 8' wide for easy transport from farm to farm (refer to local road regulations).



QUICK & EASY HEIGHT ADJUSTMENT
Spacer rings are used to set the height
and ergonomically designed handles
make it simple for a one-person
change in under 15 minutes.

TURF TIRES

Trimax Turf to
weight of the
disturbance.



ADJUSTABLE DRAWBAR
Align the drawbar with the tractor
hitch while maintaining a level
chassis with one simple adjustment.



Aluminium treadplates make up the heavy duty covers that guard the belt chamber.



t Trimax Turf tires help distribute the weight of the mower for less ground disturbance.

* OPTIONAL FEATURES.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ ON-CALL KIT

Each kit contains bearings, blades, and belts for a quick replacement in the field.

INDUSTRY LEADING WARRANTY INCLUDES SPINDLES & GEARBOXES EXPERIENCED SERVICE & SUPPORT NETWORK

KEY APPLICATIONS.

✓ Horticulture
✓ Municipalities
✓ Golf course roughs
✓ Racecourses
✓ Sports Fields

✓ Schools
✓ Aviation

WHAT'S NEW ON FLAILDEK/FX

Strength and durability are increased from the original FlailDek design with the incorporation of a high tensile steel body, a 70% stronger rotor, a stronger gearbox, and forged steel Trimax Gamma Flails. The unique converter



TECHNOLOGY FOR OUT FRONT OPERATION.

TRIMAX FLAILDEK/FX

The Trimax FlailDek FX offers a high-performance alternative to standard factory-fitted rotary mowing attachments.

FlailDek FX has the ability to deliver an exceptionally clean cut and disperse clippings safely and is used by contractors, councils, schools and land owners around the world. A highly versatile mower, FlailDek FX is also able to mulch branches up to 1 inch in diameter, mow high grass and using the unique converter flap is suitable for sports turf and other fine turf applications.

The FlailDek FX has been designed to have minimal maintenance requirements and a low total cost of ownership yet deliver maximum reliability.

TALK TO US TODAY ABOUT THE CAPABILITIES OF **FLAILDEK FX** IN YOUR ENVIRONMENT.



TRIMAX FLAIL

^{*}Minimum PTO output vary between tractor brands



This year I could not have coped without anything other than a Trimax FlailDek, it's versatile, cuts rough and fine grass even in the wet conditions and copes with it easily.

ANDREW HALL | Truelink Ltd

PRODUCT FEATURES.



REAR ROLLER

Full width rear roller prevents scalping, permits the edge of the mower to be run along curbs, adds to overall safety and produces striping.



SAFE CLIPPING DISPERSION

Safety is paramount when mowing in public areas. This is why Trimax has designed the FlailDek FX to expel debris in a downward direction behind the mower.



POWER SAVING FLAILS

Strong forged steel flail with an aerodynamic profile reduces hp requirements yet generates sufficient draft to lift grass for a clean cut.



FRONT CASTOR WHEELS

Front castor wheels allow the FlailDek FX to follow ground contours independently from the tractor. The semi-pneumatic tires are impossible to puncture.



NEW IMPROVED ROTOR

Dynamically balanced and designed for durability to withstand everyday use in the toughest mowing environments.



WEAR RESISTANT SKIDS

Wear resistant trailing skids made from abrasion-resistant steel extends bearing life and enables high productivity in the most challenging environments.

*OPTIONAL FEATURES.

✓ UNIQUE CONVERTER

Change the position of the converter flap to suit your application. Go from mowing to mulching in seconds.

✓ ON-CALL KIT

Each kit contains bearings, blades, and belts for a quick replacement in the field.





TRIMAX EZEEMON/FX

The EZEEMOW FX is the ideal partner for your compact tractor where versatility and robustness is needed.

With its compact dimension, Ezeemow FX can fit closely to the tractor and manoeuvre into tight corners. Able to mow anything from fine turf to small prunings, vegetation up to 25mm in diameter and high grass, the Ezeemow FX can transform areas into tidy mown lawn in a single pass. This versatility makes the Ezeemow FX ideal for contractors, councils, roadsides, estates, and orchard applications.

The Ezeemow FX has been designed to have minimal maintenance requirements and low total cost of ownership yet deliver maximum reliability.

SPECIFICATIONS

Cutting Width

Overall Width

Overall Length

Overall Height

Cut Height Range

Approx. Weight

135

4' 6" (1.36m)

5'1½" (1.56m)

1' 2 ½" (0.37m)

436lbs (198kg)

3' 7" (1.1m)

Total Belts 2 2 2 No. of Flails 28 32 40 Min PTO Output 17hp 20hp 24hp *Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

I've been mowing 30hrs a week for over 28 years and my Ezeemow still has the same gearbox. It produces a beautiful cut and if I had to, I'd replace it with the exact same model..no two ways about it!

155

5' (1.52m)

5' 8" (1.72m)

3' 7" (1.1m)

1' 2 ½" (0.37m)

503lbs (228kg)

3/" - 4" (10 - 100mm) 3/" - 4" (10 - 100mm) 3/" - 4" (10 - 100mm)

185

6' (1.83m)

3'7" (1.1m)

6' 8 ½" (2.05m)

1' 2 ½" (0.37m)

540lbs (245kg)

STEVE DE BRUIN | Grass Cutting Services, Tauranga NZ

KEY APPLICATIONS.

✓ Estates & Lifestyle Blocks ✓ Orchards & Vineyards ✓ Horticulture ✓ Municipalities ✓ Horse Agistment

WHAT'S NEW ON EZEEMOW/FX

Strength and durability are increased from the original Ezeemow design with the incorporation of a high tensile steel body, a 70% stronger rotor, a stronger gearbox, and forged steel Trimax Gamma Flails. The unique converter, an improved belt tensioning system, and easy height adjustment on the full width roller have also been added.



PRODUCT FEATURES.



UNIQUE CONVERTER

Superb short grass cutting ability by creating airflow that lifts grass before it's cut. For work in heavy environments, lift converter for increased productivity. The Converter flap is an optional add on.



REAR ROLLER

Full width rear roller prevents scalping, permits the edge of the mower to be run along curbs, adds to overall safety and produces striping.

EZEEZMOW OFFSET DIAGRAM

ONLY AVAILABLE IN FIXED CENTRE MOUNT OR OFFSET POSITIONS



EW IMPROVED ROTOR

Dynamically balanced and designed for durability to withstand everyday use in the toughest mowing environments.



POWER SAVING FLAILS

Strong forged steel flail with an aerodynamic profile reduces hp requirements yet generates sufficient draft to lift grass for a clean cut.




▼ RIGHT-HAND OFFSET


Available in offset or center mount to suit your specific mowing requirements. See diagram below.




SAFE CLIPPING DISPERSION

Safety is paramount when mowing in public areas. This is why Trimax has designed the Ezeemow FX to expel debris in a downward direction behind the mower.







TALK TO US TODAY ABOUT THE CAPABILITIES OF **EZEEMOW FX** IN YOUR ENVIRONMENT.





TRIMAX WARLORD S3

The all new WARLORD S3 with its hydraulic sideshift operation makes for a powerful working companion in commercial applications.

We've designed the Warlord Series 3 to be safe and reliable for roadside and contracting work and have maintained our robust build which makes the Warlord the flail mower of choice for hire fleets.

With the ability to shred branches up to 3 inches in diameter and fitted with unique features such a replaceable internal liner, pruning guide and an adjustable rear flap for servicing ease, the Warlord is a serious commercial flail mower.

TALK TO US TODAY ABOUT THE CAPABILITIES OF WARLORD SERIES 3 IN YOUR ENVIRONMENT.







SPECIFICATIONS	175	205	235
Cutting Width	5' 9" (1.74m)	6' 8" (2.04m)	7' 8" (2.34m)
Overall Width	6' 8" (2.04m)	7' 8" (2.34m)	8' 8" (2.66m)
Overall Length	3' 5" (1.05m)	3' 5" (1.05m)	3' 5" (1.05m)
Overall Height	1' 10" (0.55m)	1' 10" (0.55m)	1' 10" (0.55m)
Cut Height Range	0 - 2¾" (0 - 70mm)	0 - 2¾" (0 - 70mm)	0 - 2¾" (0 - 70mm)
Approx. Weight	1520lbs (690kg)	1650lbs (750kg)	1780lbs (810kg)
Total Belts	4	4	4
No. of Flails	24	28	32
Min PTO Output	40hp	44hp	49hp
*Minimum PTO output is a	quide only Dequirement v	aries with the type of worl	and the terrain

tput is a quide only. Requirement varies with the type of work and the terrair



We own two Warlords. No other machine has been heavy enough for what we put them through. The durability of the machine is great - what we ask of it is hard and it does it superbly.

BRANDON CHAMBLEY | Patten Seed Sod, Atlanta

KEY APPLICATIONS.

- ✓ Orchards & Vineyards
 ✓ Horticulture
- ✓ Sports Fields ✓ Schools
- Municipalities
- ✓ Turf Farms
- Aviation

WHAT'S NEW ON WARLORD/S3

The hydraulic side shift and discharge control capabilities are new from the previous Warlord series, further increasing the versatility of the machine.

PRODUCT **FEATURES**



HYDRAULIC SIDE SHIFT

The Warlord can be quickly offset to the left or right by up to 19". Perfect for transport and maneuvering around obstacles while mowing.




REPLACEABLE INTERNAL LINER

A bolt-in ¼ replaceable internal liner increases the life of the body, minimizes damage and reduces noise.


WARLORD **OFFSET** DIAGRAM

HYDRAULIC SIDE SHIFT / LEFT-HAND HAND OFFSETS AVAILABLE




DISCHARGE CONTROL

Fine mulch is produced with the flap in the lowest position. Controlling discharge assists with safety in public spaces. Lift flap open for easy flail servicing.



HEAVY DUTY ROLLER

A robust roller with 8.5mm thick walls to handle tough applications.



*OPTIONAL FEATURES.

▼ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ LEFT-HAND OFFSET

Warlord comes standard in right hand offset, but can be configured with left-hand offset. Suitable for contractors who may prefer visibility over their left hand shoulder.



Helps direct prunings in and under

the mower. Also helps keep debris


away from the hydraulic system.

Racecourses

REPLACEABLE SKIDS

PRUNING GUIDE

Skids on Warlord trailing arms prolong mower life in demanding terrain and can be replaced when required.







TRIMAX **FORCE**

The Trimax Force is the multitool mower and mulcher you need to get the job done, no matter what that job might be. Turn long grass and large prunings into an expertly cut and finely mulched field in a single pass.

As Trimax's strongest and most adaptable flail mower yet, with a wide range of options available for custom configuration, the Force can easily be tailored to produce a pristine cut and superior finish in almost any application. For reliable productivity and excellent results, the Trimax Force is the ultimate choice.





SPECS	175	205	235
Cutting Width	5' 8 ½" (1.73m)	6'7¾" (2.02m)	7′ 6 ¾" (2.3m)
Overall Width	6'7¾" (2.02m)	7'7" (2.31m)	8' 5 %" (2.59m)
Overall Length	3' 9 ½" (1.15m)	3' 9 ½" (1.15m)	3' 9 ½" (1.15m)
Overall Height	1' 7 ¾" (0.5m)	1'7¾" (0.5m)	1'7¾" (0.5m)
Cut Height Range	0 - 2 ¾" (0 - 60mm)	0 - 2 ¾" (0 - 60mm)	0 - 2 ¾" (0 - 60mm)
Approx. Weight	1665lbs (755kg)	1795lbs (815kg)	1920lbs (870kg)
Flails	24	28	32
Min PTO Output	40hp	45hp	50hp
*Minimum DTO outnut	is a quido only Doquiromo	nt varios with the tune of	work and the terrain

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

KEY APPLICATIONS.

✓ Roadsides
✓ Municipalities
✓ Parks & Reserves
✓ Orchards
✓ Vineyards
✓ Estates & Lifestyle Blocks

WHAT'S NEW ON FORCE.

Strength and durability have been increased, including 50% thicker endplates and a newly designed rotor bearing assembly with over 35% higher load capacity than Trimax's previous flail mowers. Zero-maintenance features and a wider array of options have also been introduced.

PRODUCT FEATURES.



MOW AND MULCH WITH ONE MACHINE

Mow grass to a fine finish and mulch prunings up to 3.5" in diameter with one machine.



The coarseness of mulch can be

controlled by adjusting the height of the rear flap.



SMOOTH EXTERNAL PROFILE

New internal rotor bearings create a smooth external profile and provide a closer cut around obstacles.



REPLACEABLE INTERNAL LINER

A 1/4" replaceable internal liner reduces noise and increases durability in the mower's highimpact zones.



ROLLER BEARINGS

New highly-rated sealed roller bearing stacks require no regular greasing.



HEAVY-DUTY SKIDS

Heavy-duty wear skids on the mower trailing arms prolong mower life in demanding terrain and are easily removed or replaced.



LOW MAINTENANCE

Easily accessible grease locations and maintenance-free features make regular service quicker and easier than ever.



AUTO BELT TENSIONING

The belt system is equipped with automatic tensioners to optimize drive to the rotor without requiring manual adjustments.



OFFSET CAPABILITIES

The Force can come with a leftor right-hand offset with an additional 19" of hydraulic side shift. Available on the 175, 205, and 235 models.



✓ FRONT MOUNT

Available in front mount threepoint linkage configuration for increased visibility.

→ HEAVY DUTY ROLLER

Increases roller wall thickness from 3/16" to 7/16".

✓ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ LIGHTING KIT WITH STORAGE BRACKET

LED road lights, safety triangle, and bracket for storage box.

✓ SAFETY DISPERSION GUARD

Recommended for all mowers operating in public spaces. Ensures that debris exits the cutting chamber safely.







WANT TO KNOW MORE? FIND US ONLINE.

THE TRIMAX WEBSITE.

The Trimax website contains more information, photos, and videos of our products and features.


TRIMAXMOWERS.COM



OR USE THIS OR CODE

THE TRIMAX WEB SHOP.

Easily accessed from the main website, the **Trimax Web Shop** provides everything you need to easily service and maintain your Trimax mower. Best of all, it's **completely free**.

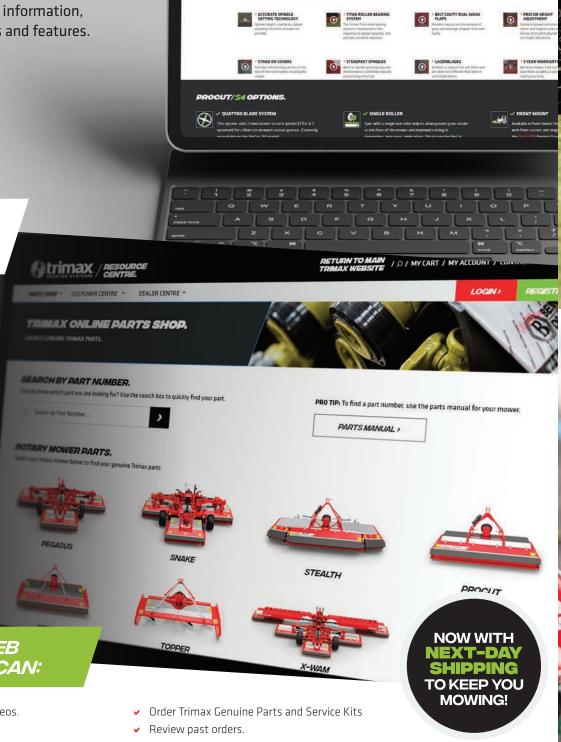


Otrimax power

WITH YOUR TRIMAX WEB SHOP ACCOUNT, YOU CAN:

- ✓ Watch step-by-step service and setup videos.
- Download maintenance checklists.
- Access the operator manual and parts manual for your mower.
- ▼ Read instructions for installing Trimax Genuine Spare Parts.
- Register warranty or file a claim.

- Upload bulk orders for quick and easy fleet maintenance.
- Quickly find common parts.
- ✓ Now with improved search functionality find exactly the part you need.

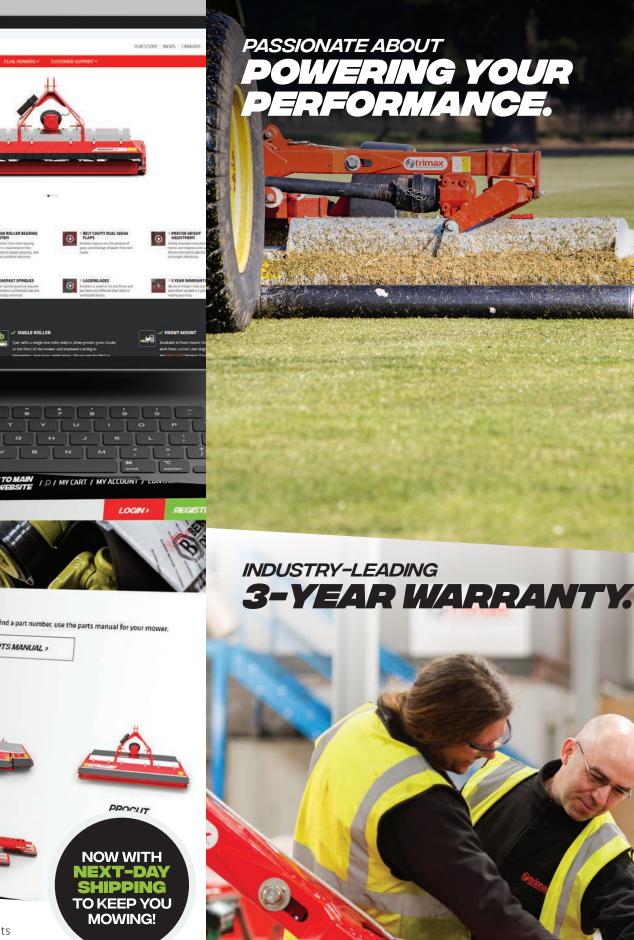

WHEN DOWNTIME IS NOT AN OPTION, SAVE MONEY ON EQUIPMENT THAT LASTS. YOU CAN COUNT ON TRIMAX.

COST OF OWNERSHIP.

- Long commercial life, with mowers 35 years old and counting still in the field.
- Reduced time, labor, and fuel requirements for each job.
- Affordable aftermarket parts guaranteed to meet
 Trimax quality standards.

RELIABLE SUPPORT.

- Next-day parts dispatch from our local warehouse in Georgia.
- Knowledgeable local service staff and easy-toaccess online resources.
- Industry-leading 3-year warranty which includes spindles and gearboxes.

PRODUCTIVITY-BOOSTING EFFICIENCY.

- Less time in the shop with minimised and simplified service requirements.
- Designed for/tested in the harshest environments for maximum uptime in normal commercial operations.
- A wide range of available options to customise for your specific needs.

TRIMAX BUILDS MOWERS
THAT LAST, AND WE BACK
THAT UP BY OFFERING
THE LONGEST AND
MOST COMPREHENSIVE
WARRANTY IN THE
INDUSTRY.

All Trimax mowers come with a standard 12-month warranty with the opportunity to extend another 24 months by registering new machines online.

- V COVERS SPINDLES
- *▼ COVERS GEARBOXES*
- *▼ ABSOLUTELY FREE*



TRIMAX MOWING SYSTEMS

310 Etowah Trace, Fayetteville, GA 30214

P +1 770 412 8402 / E info@trimaxmowers.com

FOR MOWER SALES

P +1 770 412 8402 / **E** info@trimaxmowers.com

FOR PARTS ORDERS

P +1 770 412 8402 / **E** parts@trimaxmowers.com

