



GOLF CATALOG

WELCOME TO THE TRIMAX GOLF COMMUNITY.

By fostering a culture of collaboration with our **Trimax Community**, our shared expertise enables us to consistently release industry leading products to the world.

Join us on social media!



BE A PART OF OUR JOURNEY...

f t i y v // **TRIMAXMOWERS.COM**

FOR SERVICE AND SUPPORT LIKE NO OTHER.

Our **NEW 25,500ft² manufacturing and assembly facility** is based in Fayetteville, Georgia and is our commitment to efficient lead times. With our extensive elite dealer network spanning the country and into parts of Mexico and Canada, our customers have access to the service they need when they require it, to keep them up and running.

- › **SHORT LEAD TIMES NATIONWIDE**
- › **EXTENSIVE PARTS SUPPLY**
- › **LOCAL TECH AND SERVICE SUPPORT**

MADE IN THE
USA



We know downtime is not an option.
So we support our products to the **highest standard** to keep you moving forward.

"We never stop learning about your motivations and limitations and with customer-focused design and unmatched service support we're raising the bar on results."

- **JAMIE KIZER**

Trimax Sales Rep and retired 24-year
Class A Superintendent



Our mowers are safety tested to comply with ISO (International Organization for Standardization) Safety Standards.

So you can be sure your mower is safe to use!

trimax
MOWING SYSTEMS™

WHAT TESTS DO WE DO?



→ THROWN OBJECT:

Measured by surrounding the machine with specified targets, running over a standardised media (sand and stones) whilst running the mower and analysing hits in those areas. This results in thrown debris exiting the mower in a safe manner, meaning increased safety for the operator and bystanders.



→ BLADE IMPACT:

Measured by surrounding the mower with specified targets, and lowering it onto a high tensile steel bar with the blades spinning. Ensures that the blades do not fail in an unsafe manner and remain connected to the mower for increased bystander safety.



→ FINGER AND LIMB ACCESS:

Measured by probing all gaps and openings where there are moving parts with a replica arm/elbow/finger of specified dimensions. Results in unparalleled operator safety.



→ FOOT ACCESS TO CUTTING CHAMBER:

Measured by probing cutting chamber openings with a dummy foot of standard proportions. Results in increased protection for both operator and bystanders.



→ STRENGTH OF SURFACES THAT MAY BE USED AS STEPS:

Measured by loading with specific weights. Provides a safe platform from which to hook up the tractor.

**WE'RE SERIOUS
ABOUT SAFETY.**

ISO International Standards ensure that products and services are safe, reliable and of good quality.

OUR WARRANTY CLAIMS ARE THE LOWEST IN THE INDUSTRY - LESS THAN 1%

The industry standard is over 2.5%. That means we build our mowers tough! Because of this, we're proud to offer the industry's longest warranty on all of our mowers.

INDUSTRY LEADING 3 YEAR WARRANTY

We build mowers that last and we back that up with an industry leading 3-year warranty which also includes the spindles and gearboxes. Our robust design coupled with our experienced service and support network ensures minimum downtime and maximum productivity!



→ GENUINE TRIMAX PARTS

Genuine Trimax parts have been tested and approved by us, so you can be sure of maximum performance and a longer life from your machine.

→ TECHNICAL SUPPORT

Dedicated to providing one of the best customer service models in the industry, you'll be sure to get what you need quickly and efficiently.

→ NEXT DAY DELIVERY

We understand the implications of downtime and what that means for your profitability, so where possible we make sure you receive your orders in the timeframe you request, with overnight delivery possible.*

*Terms and conditions apply. For more information contact our team at parts@trimaxmowers.com.



OUR TRIMAX MOWER RANGE...

...has been designed with our customers in mind, which means we're building machines that produce the best cut possible whilst ensuring you spend less time and money on maintenance!




Snake *S2*

Rotary Mower

Cut widths from 10' 7" - 13' 1".

Offering world class cut quality and articulation, this golf and sports turf mower provides a low cost alternative to traditional self-propelled machinery.

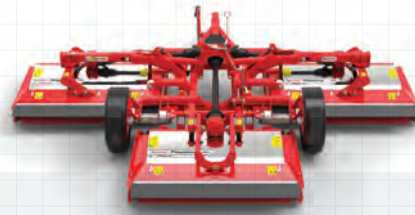


Pegasus *S4*

Rotary Mower

Cut widths from 16' 2" - 23' 9".

Established globally as the benchmark in wide-area mowing there's not much the Pegasus can't handle! Can be used on roughs where undulations are mild.

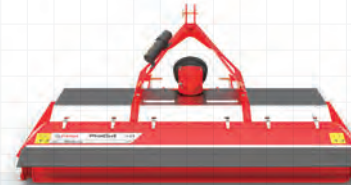

ProCut *S4*

Rotary Mower

Cut widths from 5' 8" - 9' 6".

Engineered to withstand everyday use in the toughest commercial environments. The ProCutS4 is a multi-spindled roller mower available in four cutting widths.



Striker

Rotary Mower

Cut widths from 4' 9" - 6' 4".

Fastly becoming the mower of choice amongst groundsmen, the Striker is designed for compact tractors in applications where striping and presentation is key.



EZEEMOW//FX

Flail Mower

Cut widths from 4' 6" - 6'

This versatile yet robust mower has incredibly low maintenance requirements and is an ideal partner for small, compact tractors. Great for passive areas.




FLAILDEK//FX

Flail Mower

Cut widths from 4' 6" - 6'

The FlailDek FX offers a high performing alternative to standard factory-fitted rotary mowing attachments. Great for long or short grass and for breaking cores.



WARLORD//S3

Flail Mower

Cut widths from 5' 9" - 7' 8"

This two in one, flail and mulcher mower, can deliver an exceptional cut and spread whilst also shredding pine cones and branches up to 3" in diameter. Great for woodland lots and infrequently mown areas.

"Trimax is proud to be the fresh face in the golf mowing industry. Our success is a result of 40 years of innovation which challenges the status quo. Equipment should never be a barrier to your success."

- BOB SIEVWRIGHT
Trimax Owner & Founder



trimax
MOWING SYSTEMS

Forming Valuable
Enduring Partnerships

SNAKE//S2

The Trimax SNAKE is used on some of the world's most prestigious golf courses. Featuring a cutting system which has been studied by the Sports Turf Institute of New Zealand and declared to produce a cut quality equal to a cylinder mower but with the versatility and reliability of a rotary design.

An accumulation of over 35 years of Trimax innovation, engineering and customer insight the Snake has been designed specifically for sports turf and golf courses. We've seamlessly combined our world class cut quality and articulation capabilities and believe we've created the best sports turf rotary mower in the world. Built for agility, incredibly robust and extremely low maintenance the Trimax Snake won't fail to impress.

Talk to us today about the capabilities of Snake in your environment.

WORLD CLASS
CUT QUALITY
AND ARTICULATION.

FITMENT

Trailed PTO driven multi-deck roller mower suitable for tractors with a minimum of 35hp. Recommended minimum of 50-60hp for inclined terrains or contractor use.

DESIGN AND CONSTRUCTION

Each of Trimax Snake's three mowing decks have spindles fitted with LazerBladez™ that have very high spindle speeds which increase the number of cuts per forward metre of travel giving a finer cut than comparable rotary mowers. Folding for transport and easily towed behind a compact tractor, the Snake is a cost effective alternative to traditional and expensive self-propelled options. Engineered with a low centre of gravity and with transport locks, road transport of the Snake is safe and easy. The Snake uses a monocoque body construction from 3/16" plate steel. A proven and simple belt drive system eliminates the chance of expensive gearbox damage. Automatic belt tensioners ensure maximum drive to the blades at all times.

IMPROVEMENTS OVER THE SNAKE SERIES 1

The Snake Series 2 includes the new Trimax LocTEK stubless roller bearing retention system. The roller thickness has been increased to a 3/16" heavier duty steel. The Snake now features replaceable axle stubs, a 90 degree rotatable jack stand and maintenance free pivot bushes.

APPLICATION

The Snake is exceptional on roughs and also suitable for smooth open fairways.



SPECIFICATIONS	320	400
Cutting Width	10' 7"	13' 1"
Overall Width	11' 1"	13' 6"
Overall Length	10' 4"	10' 4"
Transport Width	6' 9"	7'
Transport Height	6' 1"	7' 4"
Cut Height Range	3/8" - 4"	3/8" - 4"
No. of Blade Spindles	9	11
Approx. Weight	2821lbs	3064lbs
Min PTO Output	35hp	40hp



Between the ease of height adjustment to the ease of maintenance and greasing and the minimal bearings and belts that have to be maintained - it's a great piece of equipment.

- WES HOLSENBECK | Equipment Manager, East Lake Golf Club, Atlanta


FEATURES



LOC TEK
A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance.



AUTOMATIC BELT TENSIONERS
Automatic belt tensioners eliminate the need for belt adjustments and improves drive to the spindles and blades.

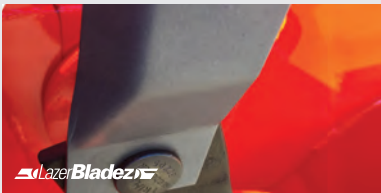

LAZERBLADEZ™
Available in up-lift and flat formation to suit mowing requirements the unique tilt forward design minimises hang back in tough conditions.



ZERO TURN
Allows continuous cutting while turning sharply for maximum productivity.



LOW MAINTENANCE
SteadFast sealed spindles have eliminated the tedious task of regular greasing. Snake Series 2 now also features maintenance free pivot bushes.



QUIKLIFT
QuickLift enables decks to be raised slightly for traversing paths without the need to disengage the PTO. Also aides in striping.



ARTICULATION ABILITY
With three articulating decks the Snake has the ability to follow contours and will not scalp at 40mm height of cut.



FULL WIDTH ROLLERS
Full width rollers minimise scalping in undulating conditions and allow mowing over kerbsides, bunkers and potholes. Also aides in striping.



EASY HEIGHT ADJUSTMENT
Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights.

- *PRODUCT OPTIONS**
- ✓ ROAD KIT
 - ✓ REMOTE UNLOCK
 - ✓ ANTI-WEAR SKIDS
 - ✓ HELICAL ROLLER SCRAPERs

For full descriptions of Options go to Page 24 →

INDUSTRY LEADING WARRANTY

3 YEAR

INCLUDES SPINDLES & GEARBOXES
EXPERIENCED SERVICE & SUPPORT NETWORK

SNAKE/S2

WITH SHORTER DIAMETER BLADE BEAMS AND A HIGHER SPINDLE SPEED THE TRIMAX SNAKE PRODUCES THE FINEST ROTARY CUT ON THE MARKET.

Blade tip speed is similar across all brands, and some brands are running tip speeds higher than required as the cleanest cut possible is only achievable within a certain speed range. Too fast and power and fuel is wasted, too slow and the grass is torn and damaged. What really matters is how many cuts or rotations the blade achieves per forward yard of travel, which is where spindle speed comes in.



FASTER SPINDLE SPEEDS EQUAL CUT EFFICIENCY

A SHORTER diameter blade beam at higher spindle speed produces more cuts per forward yard compared to a LARGER diameter blade beam. Here's why,

Say the blade tip speed is fairly similar for both blade lengths:


- ➔ The LARGE blade rotating at 3,085 rpm - makes 6,170 cuts per minute
- ➔ The SMALL blade on a faster spindle rotating at 3,486 rpm makes 6,972 cuts per minute

"That's an extra 802 cuts per minute, or 13% more cuts for every yard of forward distance travelled regardless of travel speed!"

COMPETITOR MOWER SPINDLE

SLOWER SPINDLE SPEED/LONGER BLADE
A lower number of rotations/cuts per forward yard of travel and a larger 'clipping' of grass.

EACH SPINDLE PROCESSES A LARGER VOLUME OF GRASS IN ONE ROTATION

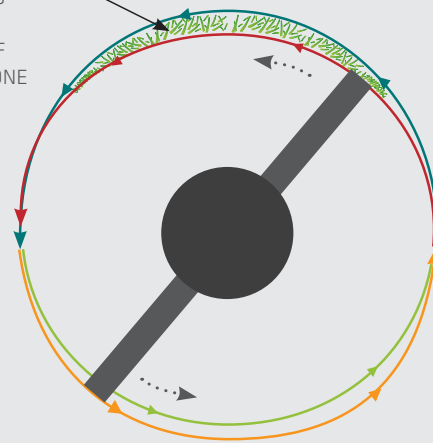

LEFT BLADE

- Left Blade 1st Half Rotation
- Left Blade 2nd Half Rotation


RIGHT BLADE

- Right Blade 1st Half Rotation
- Right Blade 2nd Half Rotation

TRIMAX SNAKE 320 SPINDLE

FASTER SPINDLE SPEED/SHORTER BLADE
A greater number of rotations/cuts per forward yard of travel and a smaller 'clipping' of grass.

EACH SPINDLE PROCESSES A SMALLER VOLUME OF GRASS IN ONE ROTATION

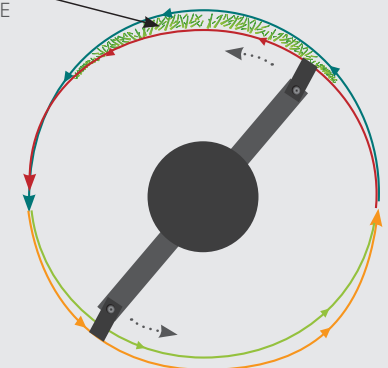

Note: Representation only - measurements not to precise dimensions



SNAKE/S2

THE AVERAGE ANNUAL MAINTENANCE COST OF A TRIMAX SNAKE IS **50% LESS* THAN A DEDICATED SELF-PROPELLED UNIT. **THAT'S IMPRESSIVE!****

*Based on a 1000 hour service and includes tractor maintenance cost

MAINTENANCE TIME IS ALSO SIGNIFICANTLY REDUCED.

TRIMAX SNAKE MONTHLY SERVICE

40 Hour (Monthly) Service includes:

- › Inspect float beams and outriggers
- › Inspect and grease pivot bushes
- › Check tires for wear, set pressure
- › Inspect, clean, grease PTO's
- › Grease and adjust wheel bearings
- › Grease roller bearings (8hr greasing)
- › Grease height adjusters and jack stand

2.5 HOURS

TRIMAX SNAKE ANNUAL SERVICE

1000 Hour (Yearly) Service includes:

- › Blade and bolt change
- › Belt change
- › Plus 40 hour service items

4 HOURS





STRIKER

Trimax STRIKER is a multi-spindled rotary mower with extremely low maintenance requirements and is ideal for use on compact tractors.

The Trimax Striker is designed to give a high cut quality and an excellent spread of clippings. Highly versatile, the Striker is capable of mowing grass $\frac{3}{8}$ " - 4" and is great for controlling grass that reel mowers occasionally miss. With an enclosed cutting chamber and a downward rear dispersion of clippings, the Striker has surpassed international safety standards making it one of the safest mowers on the market for use in public spaces.

Fitted with Trimax's exclusive LazerBladez™, the Striker can produce a cut and finish to rival that of a cylinder mower and is ideal for golf courses where presentation is key!

Talk to us today about the capabilities of Striker in your environment.



FAIRWAY MOWING
AND STRIPING OF THE
HIGHEST QUALITY.

FITMENT

Rear 3-point linkage mounted compact tractor roller mower. Suitable for tractors with a minimum of 25-35hp.

DESIGN AND CONSTRUCTION

Trimax Striker incorporates a unique baffle design for improved grass distribution and less clumping. Engineered with a deep cut chamber, the Striker is able to deliver an even spread of clip from the back of the machine, creating a superb finish.

Spindles are housed in maintenance-free fabricated steel housings with a large 6 bolt flange and each spindle has 2 Trimax LazerBladez™ mounted on spring steel blade beams.

The Striker uses a monocoque body construction from 3/16" plate steel. With full width rollers front and rear the mower will not scalp over uneven ground. A comparably short mower front to rear coupled with a floating top link makes for excellent contour following. A proven and simple belt drive system eliminates the chance of expensive gearbox damage and is easily adjusted.

APPLICATION

Exceptional utility mower. Suitable on bents or areas where cylinder mowers miss longer stalky grass.



"The Striker takes full advantage of newer manufacturing technology such as laser cutting and CNC folding to make its components simpler, lighter and stronger. It's easy to adjust and maintain, the design is logical and it's a reliable, competent and strong machine."


- JIM MCEWEN | Senior Innovation Advisor of Trimax Mowing Systems

→ FEATURES



DOUBLE ROLLERS

A double roller configuration reduces scalping and delivers outstanding results.

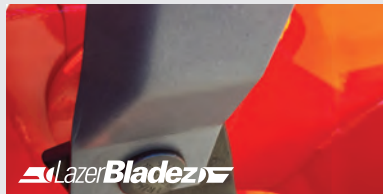

LAZERBLADEZ™

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



SAFETY FOR PUBLIC PLACES

Striker exceeds international safety standards, and can be used with confidence in public spaces where people are in close proximity.



STRIPING CAPABLE

Fitted with full width front and rear rollers, the Striker can produce striped patterned turf for those spaces where presentation is key.



COMPACT TRACTOR SUITABLE

Able to be paired with tractors as low as 25hp the Striker is perfect for smaller budgets and compact tractors.



SPECIFICATIONS

	150	190
Cutting Width	4' 9"	6' 4"
Overall Width	5' 11"	6' 8"
Overall Length	3' 10"	3' 10"
Height	2' 8"	2' 8"
Cut Height Range	3/8" - 4"	3/8" - 4"
No. of Blade Spindles	3	4
Approx. Weight	688lbs	846lbs
Min PTO Output	20hp	25hp



"It cuts forward, reverses into tight spots on the short course and leaves a striped effect on the 200 yard range like you see at the MCG"

- TERRY BOWMAN | Director of Golf Operations, Beay Golf Driving Range, Melbourne Australia




*PRODUCT OPTIONS

✓ HELICAL ROLLER SCRAPERS

For full description of Options go to Page 24 →



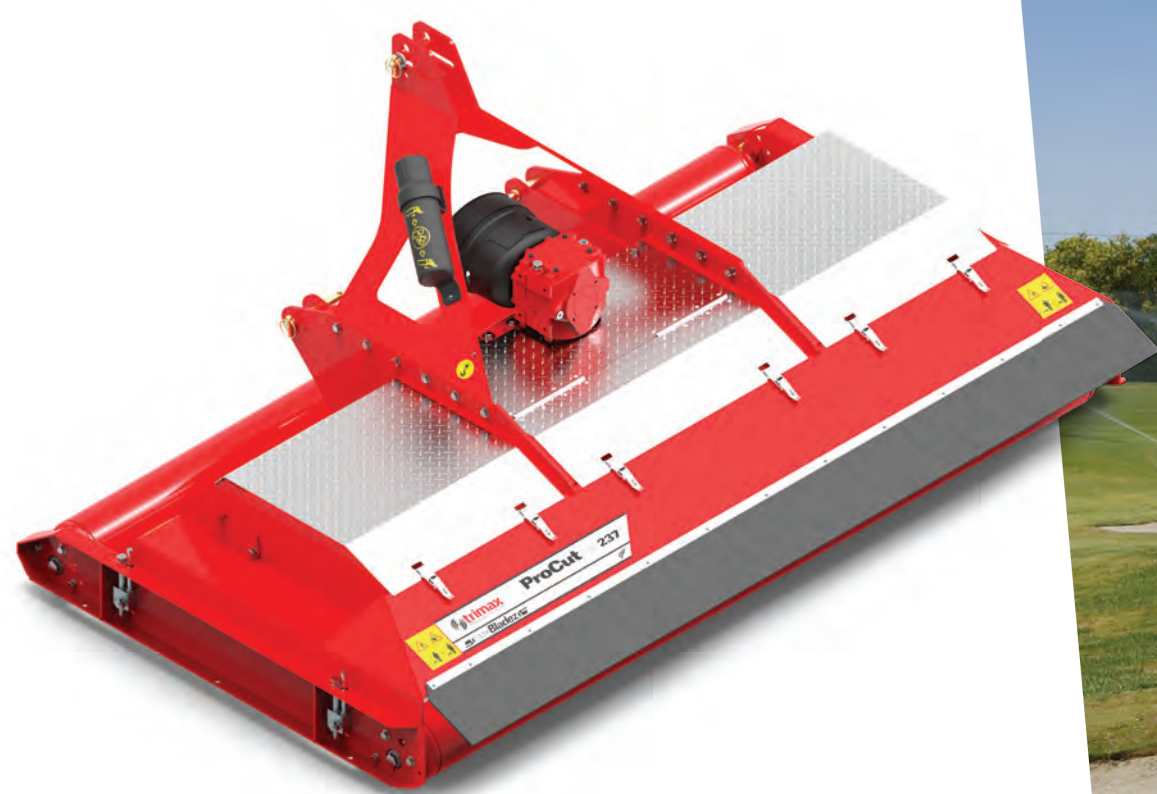

PROCUT/S4

A highly versatile commercial roller mower, the PROCUT SERIES 4 is a multi-spindled roller mower designed to give high cut quality and a great clipping spread.

A successful component of the Trimax range for over 30 years, the Procut is ideally suited for smaller golf courses and driving ranges, mowing exceptionally well in the wet.

The ProCut Series 4, released in 2018, is excellence refined. Now even easier to operate and maintain than ever before the ProCut still retains many of the aspects that propelled it to become one of the best turf mowers on the market.

Talk to us today about the capabilities of ProCut S4 in your environment.



ENGINEERED TO WITHSTAND
EVERYDAY USE IN THE
TOUGHEST COMMERCIAL
ENVIRONMENTS.

FITMENT

Rear 3-point linkage mounted tractor roller mower. Suitable for tractors with a minimum of 35-55hp.

DESIGN AND CONSTRUCTION

Trimax mowers are engineered with a high number of spindles and have shorter blade beams which give more cuts per forward metre of travel and a fine cut. Roller bearings have been mounted inboard for better protection and are easily greasable through the side channels. The ProCut uses a monocoque body construction from $\frac{3}{16}$ " plate steel. A comparably short mower front to rear and a floating top link ensures contour following on uneven ground. A proven and simple belt drive system eliminates the chance of expensive gearbox damage and is easily adjusted.

IMPROVEMENTS OVER THE PROCUT SERIES 3


Stand on covers make coupling to the tractor safer and new quick release latches and dual wash ports ensure easy maintenance and cleaning of the belt cavity. The new LocTEK stubless roller retention system and increased strength tri-bolt bearing housing reduces maintenance significantly. The 210 model now features extended side channels for improved long grass intake. RapidSET™ height adjustment and an improved PVK holding strip have also been introduced.

APPLICATION

Suitable for roughs and general maintenance areas.



SPECIFICATIONS	178	210	237	290
Cutting Width	5' 8"	6' 9"	7' 7"	9' 6"
Overall Width	6' 2"	7' 3"	8' 1"	10' 3"
Overall Length	4' 5"	4' 5"	4' 5"	4' 5"
Height	3' 7"	3' 7"	3' 7"	3' 7"
Cut Height Range	$\frac{3}{8}$ " - 4"	$\frac{3}{8}$ " - 4"	$\frac{3}{8}$ " - 4"	$\frac{3}{8}$ " - 4"
No. of Blade Spindles	3	3	4	5
Approx. Weight	1126lbs	1340lbs	1413lbs	1697lbs
Min PTO Output	35hp	40hp	45hp	55hp



The ProCut is the best mower I've ever had... it mows my turf to perfection.

- CHRISTOPH GERBERDING Polo Grounds, Milford, New Jersey

FEATURES



LOC TEK

A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance.



STEAFAST SEALED SPINDLES

We've eliminated the tedious task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.



LAZERBLADEZ™

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.




ADVANCED ENGINEERING

Trimax's meticulous design process combined with bespoke, innovative manufacturing technologies produce the most accurate rotary cut in the market.



RAPIDSET HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights.

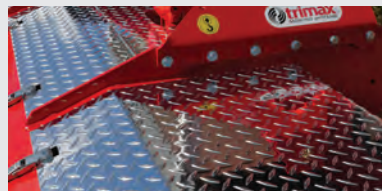

STAND ON COVERS

Enables safe and easy access to the rear of the tractor when coupling the mower. Quick release latches allow easy removal for cleaning and servicing.



DUAL WASH PORTS

Provides easy access for the removal of grass and drainage of water from the belt cavity while cleaning.



FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions and allow mowing over kerbsides, bunkers and potholes. Also aides in striping.

INDUSTRY LEADING WARRANTY

3
YEAR

INCLUDES SPINDLES
& GEARBOXES
EXPERIENCED SERVICE
& SUPPORT NETWORK

*PRODUCT OPTIONS

- ✓ QUATTRO BLADE SYSTEM
- ✓ SINGLE REAR ROLLER
- ✓ FRONT MOUNT
- ✓ ANTI-BOUNCE SKIDS
- ✓ HELICAL ROLLER SCRAPERS
- ✓ STORAGE AND LIGHTING KIT
- ✓ GALVANIZED

For full descriptions of Options go to Page 24 →

PEGASUS//S4

The PEGASUS has established itself globally as the benchmark in wide-area mowing.

The Trimax Pegasus was the world's first multi-deck roller mower and has been a successful part of the Trimax range for more than 17 years. The Pegasus has articulation capacity and is engineered to be incredibly robust for full-time commercial use.

The Pegasus Series 4 is our newest and lowest maintenance version of the trailed mower. With its wide cutting widths and ability to mow at speeds up to 9 mph on flat terrain, the Pegasus is one extremely efficient mower.

Talk to us today about the capabilities of Pegasus Series 4 in your environment.



PLAY THE LONG
GAME WITH THE
HEAVY DUTY PEGASUS!

FITMENT

Trailed PTO driven wide area mower suitable for tractors with a minimum of 60hp.

DESIGN AND CONSTRUCTION

Pegasus has 3 multi-spindle double roller mowing decks on a roadworthy chassis that folds to 8' 2" for road transport. Mowing decks have a physical safety lock and a safety lanyard for travel in the raised position.

With Trimax LazerBladez™ and multiple spindles with shorter blade beams the Pegasus gives more cuts per forward metre of travel and produces a finer cut than comparable rotary mowers. The Pegasus uses a monocoque body construction from 3/16" plate steel. A proven and simple belt drive system eliminates the chance of expensive gearbox damage and is easily adjusted.

✓ IMPROVEMENTS OVER THE PEGASUS SERIES 3

The Pegasus Series 4 includes the new Trimax LocTEK stubless roller bearing retention system, and reduced grease points resulting in a 35% reduction in maintenance costs. Other improvements include RapidSET™ height adjustment, easily replaceable side channel bolts and a waterproof lighting loom.

APPLICATION

Suits courses with open and gentle rolling roughs.



SPECIFICATIONS

493

Cutting Width	16' 2"
Overall Width	16' 8"
Overall Length	14' 4"
Transport Width	8' 2"
Transport Height	8' 6"
Cut Height Range	3/8" - 4"
No. of Blade Spindles	9
Approx. Weight	4806lbs
Min PTO Output	60hp



The quality of cut, longevity of the machine and reduced maintenance is unparalleled.
- **ANDY HAGAR** | Director of Golf Course Operations, Pearl Country Club, Aiea Hawaii

➔ FEATURES



LOC TEK

A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance.



SUSPENSION

The Pegasus is fitted with a Duratorque Suspension System capable of highway speeds.



LAZERBLADEZ™

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



ROAD TRANSPORTABLE

Equipped with a roadworthy chassis the Pegasus is capable of being towed at highway speeds (subject to local road regulations).



LOW MAINTENANCE

We've introduced new features such as SteadFast sealed spindles which has reduced maintenance by 25%.



FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions allow mowing over kerbsides and bunkers and potholes. Also aides in striping.



RAPIDSET HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings.



WHEELS RUN ON CUT GRASS

As the rear deck is located between the rear transport wheels, grass is not flattened by wheels prior to mowing, a feature unique to Trimax.



*OPTIONAL FEATURES

- ✓ INDIVIDUAL LIFT SYSTEM
- ✓ QUATTRO BLADE SYSTEM
- ✓ REMOTE UNLOCK
- ✓ HELICAL ROLLER SCRAPERS
- ✓ ELECTRIC BRAKES
- ✓ ANTI-BOUNCE SKIDS
- ✓ QUIKLIFT
- ✓ ROAD READY LIGHTING KIT
- ✓ SPARE TIRE KIT
- ✓ TURF TIRES
- ✓ GALVANIZED

For full description of Options go to Page 24 ➔



EZEEMOW//FX

The new EZEEMOW FX is the ideal partner for your compact tractor where versatility and robustness is needed.

With its compact dimension Ezeemow FX can fit closely to the tractor and manoeuvre into tight corners. Able to mow anything from fine turf to small prunings, vegetation up to 1" in diameter and high grass, the Ezeemow FX can transform areas into tidy mown lawn in a single pass. This versatility makes the Ezeemow FX ideal for golf applications including roughs and roadsides.

The Ezeemow FX has been designed to have minimal maintenance requirements and low total cost of ownership whilst delivering maximum reliability.

Talk to us today about the capabilities of Ezeemow FX in your environment.



TRIMAX FLAIL
TECHNOLOGY FOR
COMPACT TRACTORS.

FITMENT

Rear 3-point linkage mounted compact flail mower suitable for tractors with a minimum of 17-24hp.

DESIGN AND CONSTRUCTION

The Ezeemow FX has a low and compact design which mounts close to the tractor. The front of the body aperture is very open and is fitted with a row of hinged safety flaps which fold back to allow standing vegetation easy entry yet contain any thrown objects. The Ezeemow uses a monocoque body construction made from 1/8" high tensile plate steel.

IMPROVEMENTS OVER THE ORIGINAL EZEEMOW

Ezeemow FX is a total re-design of the original Ezeemow with a change in construction to a high tensile steel, a larger diameter rotor (70% stronger) and forged steel Gamma Flails™. A stronger gearbox has been used and an improved belt tensioning system. The full width rear roller is now easily height adjustable.

THE CONVERTER™ FEATURE

The Converter™ feature is unique to Trimax and changes a versatile "jack-of-all trades" flail mower into a machine that is a master of widely differing conditions. In the short grass configuration it excels when mowing quality turf, lifting each blade to eliminate wheel marks. Move the Converter and the same machine transforms metre-high grass and stalky weeds into lawn in a single pass.

APPLICATION

Use to control course boundaries and infrequently mown areas. Mulches pine cones and small branches.

			
SPECIFICATIONS	135	155	185
Cutting Width	4' 6"	5'	6'
Overall Width	5' 1"	5' 8"	6' 9"
Overall Length	1' 11"	1' 11"	1' 11"
Cut Height Range	3/8" - 4"	3/8" - 4"	3/8" - 4"
Approx. Weight	436lbs	503lbs	540lbs
Total Belts	2	2	2
Min PTO Output	17hp	20hp	24hp



I've been mowing 30hrs a week for over 28 years and my Ezeemow still has the same gearbox. It produces a beautiful cut and if I had to, I'd replace it with the exact same model..no two ways about it!

- STEVE DE BRUIN | Grass Cutting Services, Tauranga NZ

FEATURES



POWER SAVING FLAILS

Strong forged steel flail with an aerodynamic profile reduces hp requirements yet generates sufficient draught to lift grass for a clean cut.



REAR ROLLER

Full width rear roller prevents scalping, permits the edge of the mower to be run along kerbs, adds to overall safety and produces striping.



NEW IMPROVED ROTOR

Designed to withstand the toughest environments our new rotor is more durable ensuring downtime is kept to an absolute minimum.



SAFE CLIPPING DISPERSION

Safety is paramount when mowing in public areas. This is why Trimax has designed the Ezeemow FX to expel debris in a downward direction behind the mower.



UNIQUE CONVERTER

Superb short grass cutting ability by creating airflow that lifts grass before it's cut. For work in heavy environments lift converter for increased productivity.



*OFFSET OR CENTRE MOUNT OPTIONS

Available in offset or centre mount to suit your mowing requirements



*PRODUCT OPTIONS

For full descriptions of Options go to Page 24 →





FLAILDEK//FX

The Trimax FLAILDEK FX offers a high-performance alternative to standard factory-fitted rotary mowing attachments.

FlailDek FX has the ability to deliver an exceptionally clean cut and disperse clippings safely and is used by contractors, councils, golf courses and land owners around the world. A highly versatile mower, FlailDek FX is also able to mulch branches up to 1 inch in diameter, mow high grass and using the unique converter flap is suitable for sports fields and other fine turf applications.

The FlailDek FX has been designed to have minimal maintenance requirements and a low total cost of ownership yet deliver maximum reliability.

Talk to us today about the capabilities of FlailDek FX in your environment.

TRIMAX FLAIL
TECHNOLOGY FOR OUT
FRONT OPERATION.



FITMENT

A front mounted flail mower that can be fitted to a wide range of tractors including John Deere, Kubota, Iseki, New Holland and Shibaura out-front tractors. FlailDek FX is supplied complete with mounting arms and PTOs to suit the brand of tractor. Minimum hp recommendations vary between tractor brands.

DESIGN AND CONSTRUCTION

The FlailDek FX has a low compact design which mounts close to the tractor. Mounted by linkage arm adapters and quick hitch using one pin, the mower floats independently and lifts high for kerb clearance. The front of the body aperture is very open and is fitted with a row of hinged safety flaps which fold back to allow standing vegetation easy entry yet contain any thrown objects. Roller bearings are encased in protective housings. The FlailDek uses a monocoque body construction made from 1/8 inch high tensile plate steel.

THE CONVERTER™ FEATURE

The Converter™ feature is unique to Trimax and changes a versatile "jack-of-all trades" flail mower into a machine that is a master of widely differing conditions. In the short grass configuration it excels when mowing quality turf, lifting each blade to eliminate wheel marks. Move the Converter and the same machine transforms metre-high grass and stalky weeds into lawn in a single pass.

APPLICATION

Suitable for tough to mow areas. Great on long grass, light brush and for breaking up cores.

FEATURES



UNIQUE CONVERTER

Superb short grass cutting ability by creating airflow that lifts grass before it's cut. For work in heavy environments lift converter for increased productivity.



SAFE CLIPPING DISPERSION

Safety is paramount when mowing in public areas. This is why Trimax has designed the FlailDek FX to expel debris in a downward direction behind the mower.



REAR ROLLER

Full width rear roller prevents scalping, permits the edge of the mower to be run along kerbs, adds to overall safety and produces striping.



FRONT CASTOR WHEELS

Front castor wheels allow the FlailDek FX to follow ground contours independently from the tractor. The semi-pneumatic tires are impossible to puncture.



POWER SAVING FLAILS

Strong forged steel flail with an aerodynamic profile reduces hp requirements yet generates sufficient draught to lift grass for a clean cut.



NEW IMPROVED ROTOR

Designed to withstand the toughest environments our new rotor is more durable ensuring downtime is kept to an absolute minimum.



WEAR RESISTANT SKIDS

Wear resistant trailing skids made from abrasion-resistant steel extends bearing life and enables high productivity in the most challenging environments.



"This year I could not have coped without anything other than a Trimax FlailDek, it's versatile, cuts rough and fine grass even in the wet conditions and copes with it easily."
- ANDREW HALL | Truelink Ltd.

SPECIFICATIONS	135	155	185
Cutting Width	4' 6"	5'	6'
Overall Width	5' 1"	5' 8"	6' 9"
Overall Length	3' 7"	3' 7"	3' 7"
Cut Height Range	¾" - 4"	¾" - 4"	¾" - 4"
Approx. Weight	520lbs	534lbs	617lbs
Total Belts	2	2	2
Min PTO Output	Front mount HP's vary between tractor brands. Please inquire		

WARLORD//S3

The WARLORD S3 with its hydraulic side shift operation makes for a powerful working companion in commercial applications.

The Warlord is perfect for weed abatement, mulching turf off-cuts, roadside mowing and infrequently mown areas. Easily converts from a grass mower to a mulcher in minutes. With the ability to shred branches up to 3 inches in diameter and fitted with unique features such as a replaceable internal liner, pruning guide and an adjustable rear flap for easy servicing, the Warlord is a serious commercial flail mower.

Talk to us today about the capabilities of Warlord Series 3 in your environment.



HEAVY DUTY FLAIL
MULCHER MOWER.

FITMENT

Rear 3-point linkage tractor mounted flail mower to suitable for tractors with a minimum of 40-50hp.

DESIGN AND CONSTRUCTION

Warlord has a dynamically balanced rotor constructed from $\frac{7}{16}$ " seamless wall tube. Hinged front safety flaps allow a large volume of material into the cutting chamber and prevent material being thrown forward. The Warlord features an easily adjusted four-belt drive to the rotor using SPBX belts.

The Warlord has a monocoque body construction made from $\frac{1}{4}$ inch plate steel. Warlord comes right hand offset as standard unless specified otherwise.

IMPROVEMENTS OVER THE WARLORD SERIES 2

Warlord Series 3 now features hydraulic sideshift, perfect for manoeuvring around obstacles. To control the coarseness of the mulch you can lower/lift the rear flap. The finest mulch is produced with the flap in the lower position whilst lifting the flap allows more material to be processed. Controlling the discharge also assists with safety in public areas. Ease of servicing is achieved with the flap fully open.

APPLICATION

Suitable for mowing long grass in infrequent mow areas. Convert to mulcher in a matter of minutes to mulch waist high scrub and branches up to 3" thick.



SPECIFICATIONS	175	205	235
Cutting Width	5' 9"	6' 8"	7' 8"
Overall Width	6' 8"	7' 8"	8' 8"
Overall Length	3' 4"	3' 4"	3' 4"
Cut Height Range	0 - 2 $\frac{3}{4}$ "	0 - 2 $\frac{3}{4}$ "	0 - 2 $\frac{3}{4}$ "
Approx. Weight	1455lbs	1653lbs	1763lbs
Total Belts	4	4	4
Min PTO Output	40hp	44hp	50hp
Flails per mower	24	28	32
Rollers	1	1	1



The Warlord's an unbelievable machine, we run it through fern, bracken and gorse 6 feet high and get it down to soil so we can extend our fairways.

- ALUN CRICHTON | Head Greenkeeper at Kington Golf Club, Kington England

FEATURES



HYDRAULIC SIDE SHIFT

The Warlord can be quickly offset to the left or right by up to 20 inches. Perfect for transport and manoeuvring around obstacles whilst mowing.



DISCHARGE CONTROL

Fine mulch is produced with the flap in the lowest position. Controlling discharge assists with safety in public spaces. Lift flap open for easy flail servicing.




PRUNING GUIDE

Helps direct prunings in and under the mower. Also helps keep debris away from the hydraulic system.



REPLACEABLE INTERNAL LINER

A bolt-in $\frac{1}{4}$ inch replaceable internal liner increases the life of the body, minimises damage and reduces noise.

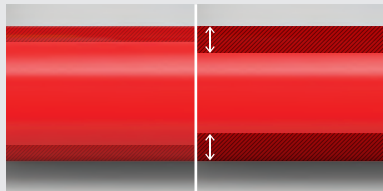

*ROADSIDE ROLLER

A replaceable $\frac{7}{16}$ " heavy duty roller for demanding applications such as roadsides. Roller height can be easily adjusted.



*PRODUCT OPTIONS

- ✓ ROADSIDE SKIDS
- ✓ HELICAL ROLLER SCRAPERS
- ✓ TACA FLAILS

For full descriptions of Options go to Page 24 →



PRODUCT OPTIONS.



← INDIVIDUAL LIFT SYSTEM

The Individual Lift System allows independent lift of either side deck for reduced cutting in confined spaces



← REMOTE UNLOCK

Allows the electric unlock of decks by pushing a button from inside the tractor cab. Replaces the standard transport lock release rope.




← ROAD KIT

The road kit option adds mudguards to wheels and includes LED tail light clusters, and safety chains.



← HELICAL ROLLER SCRAPERS

Trimax helical roller scrapers apply constant pressure on the mower rollers keeping them clean and free of clippings and reduces grass clumping in wet conditions.



← DUAL WASH PORTS

Provides easy access for the removal of grass and drainage of water from the belt cavity while cleaning.



← TURF TIRE

Trimax Turf tires help distribute the weight of the mower for less ground disturbance. Recommended for golf courses or fine turf applications.



← QUIKLIFT

Enables mower decks to be raised slightly to traverse paths without disengaging the PTO. Protects cool season grass from damage when turning and allows effective striping of turf.



← TACA FLAILS

TACA coated flails add considerable extra life to the flails, particularly effective where hard ground conditions exist and great for use on turf scrap and ribbon removal.



← ANTI-BOUNCE WEAR SKIDS

Reduces wear on side channels when operating in harsh terrain, also eliminates 'scalping' when mowing on uneven turf and stops mower decks from bouncing when mowing at high speeds.

DID YOU KNOW OUR SERVICE AND PARTS STAFF ARE AVAILABLE 18 HOURS A DAY!

Have a parts query or a mechanical issue?

MONDAY TO THURSDAY 8AM - 11PM

FRIDAY 8AM - 5PM

SUNDAY 2PM - 11PM

Based on East Coast daylight savings time

**GIVE ONE OF OUR FRIENDLY TEAM
A CALL ON 770 412 8476 OR EMAIL
PARTS@TRIMAXMOWERS.COM**



Daniel



Pamela



Zach



Jesse

*"We believe our service model is
one of the best in the industry"*

- JESSE CAWTHON | Spare Parts Manager, Trimax Mowing Systems



CONTACT YOUR LOCAL TRIMAX REPRESENTATIVE.



**JAMIE
KIZER**

**SALES
REPRESENTATIVE**
Texas, Oklahoma, Colorado,
New Mexico, Louisiana,
Missouri
CALL 512-755-0159



**SCOTT
HERRON**

**SALES
REPRESENTATIVE**
Mississippi, Alabama,
Tennessee, Georgia, Florida,
The Carolina's, Arkansas,
Louisiana and Kentucky
CALL 678-572-2283



**ZACHARY
JOHNSON**

**SALES
REPRESENTATIVE**
Mississippi, Alabama,
Tennessee, Georgia, Florida,
The Carolina's, Arkansas,
Louisiana and Kentucky
CALL 770-468-4207



**RAYMOND
PREFUME**

**SALES
REPRESENTATIVE**
Arizona, California, Idaho,
Montana, Nevada, North
Dakota, Oregon, South
Dakota, Utah, Washington
and Wyoming
CALL 626-656-0397



**NATHAN
LYKKEGAARD**

**SALES
REPRESENTATIVE**
Illinois, Iowa, Minnesota,
Missouri, Nebraska, North
Dakota, South Dakota,
Wisconsin
CALL 319-206-6942



**AARON
SPOONEMORE**

**SALES
REPRESENTATIVE**
Connecticut, Delaware, Indiana,
Maryland, Massachusetts,
Maine, Michigan, New
Hampshire, New Jersey, New
York, Ohio, Pennsylvania, Rhode
Is., Virginia, West Virginia
CALL 317-601-9791



**RAY
LE PROU**
**TECHNICAL
ADVISOR**

United States
Covering all states.
CALL 336-202-8031

**GET IN TOUCH BELOW
TO FIND YOUR NEAREST
TRIMAX ELITE DEALER**
INFO@TRIMAXMOWERS.COM
P 770 412 8402

WHAT DO OUR CUSTOMERS SAY?

View our
**TESTIMONIAL
VIDEOS
ONLINE!**



"It was obvious pretty quick that with the Snake we could not only save a lot of labor but provide a better quality of cut. It's so versatile, we can use it to mow rough and we can use it to mow fairways."

- BRIAN BUCKNER

Superintendent, Golf Club of Houston, Houston Texas

"This is a mower where you don't know how you ever did it without it.... Its revolutionary! We've had very little maintenance and its completely eliminated trim work around bunkers and slopes."

- ANDY MCGUIRE

Superintendent, St Johns Country Club, Augustine Florida

"With the Trimax we've got a reliable unit that's not going to cost a lot to repair. It can handle rough terrain and still give a great quality of cut."

- ANDY HAGAR

Director of Golf Course Operations,
Pearl Country Club, Hawaii


"Between the ease of height adjustment to the ease of maintenance and greasing and the minimal bearings and belts that have to be maintained - it's a great piece of equipment."

- WESLEY HOLSENBACK

East Lakes Head
Equipment Manager



 **trimax**[™] // **POWERING
PERFORMANCE.**
MOWING SYSTEMS

 310 Etowah Trace, Fayetteville Georgia, 30214 // P 770 412 8402 // info@trimaxmowers.com

     // **TRIMAXMOWERS.COM**

Your nearest authorised dealer: